# CRT ADAPTER

B+K PRECISION

# CR-42

SOCKET WITHOUT WIRES — 749-113-9-001

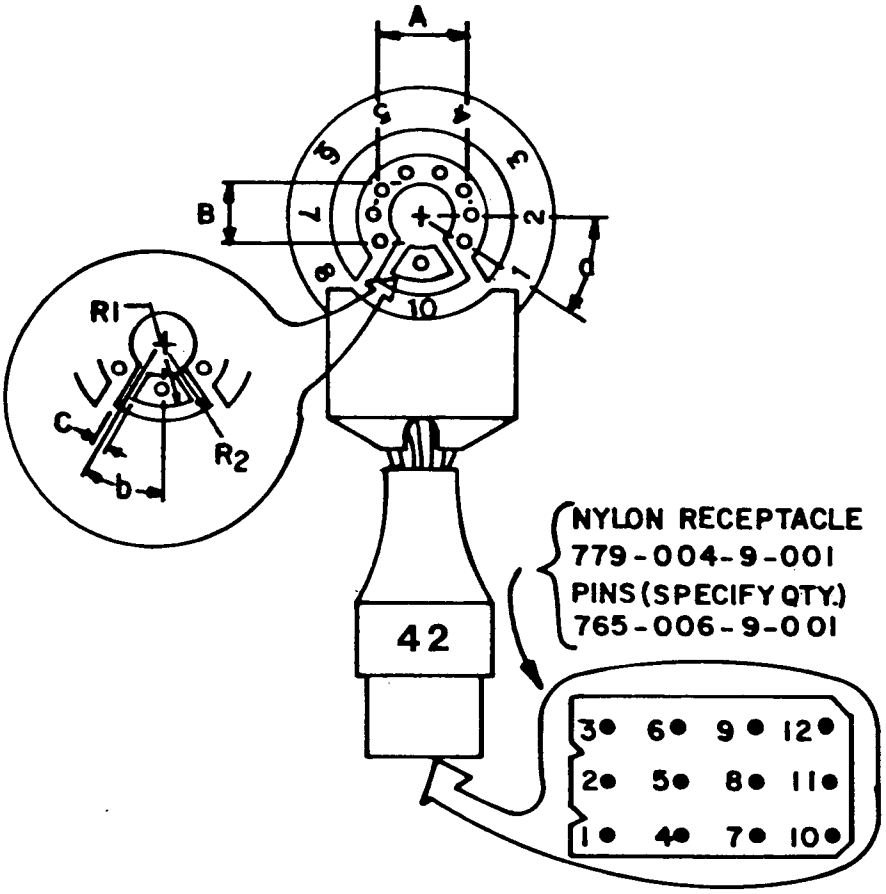


WIRING SCHEME

| CRT SOCKET PIN | WIRE COLOR | NYLON RECEP-TACLE |
|---|---|---|
| 1 | YEL | 6 |
| 2 | RED | 3 |
| 3 | BLK | 1 |
| 4 | BRN | 2 |
| 5 | ORG | 4 |
| 6 | BLU | 8 |
| 7 | GRN | 7 |
| 8 | VIOLET | 9 |
| 9 | keyway | — |
| 10 | WHT | 12 |
| 11 | keyway | — |

FITS CRT DIMENSIONS:

| | | |
|---|---|---|
| A | = pin circle diameter | = 12.0 mm/0.472" nom. |
| a | = angular pin spacing | = 32.727° |
| b | = angular keyway spacing | = 32.727° |
| B | = post diameter | = 7.4 mm/0.291" max. |
| C | = keyway width | = 1.2 mm/0.047" max. |
| R1 | = inner radius keyway | = 8.8 mm/0.346" max. |
| R2 | = outer radius keyway | = 10.2 mm/0.401" max. |


B+K PRECISION DYNASCAN CORPORATION

FACTORY SERVICE OPERATIONS
6460 West Cortland Street
Chicago, Illinois 60635
(312)889-8870
Telex # 25-3475

Used with B & K-Precision Models: 467, 470

| TUBE TYPE | HEATER VOLTAGE | TUBE TYPE | HEATER VOLTAGE |
|---|---|---|---|
| A14JJD30X | 6.0 | A26JJE00X01 | 6.3 |
| A26JAS01X | 6.3 | 200RB22 | 6.0 |
| A26JAS30X | 6.3 | 290KB22 | 6.3 |
| A26JAS31X | 6.3 | 370JNB22 | 6.3 |
| A26JJE00X | 6.3 | 370JRB22 | 6.3 |

In order to keep your set-up chart up-to-date, it is recommended that you subscribe to the B & K-Precision chart mailing service. These mailings will occur in May and November of each year and will include all the tubes presently listed on your chart plus all new types of CRT's that have come out since the last mailing.

If you wish to take advantage of this service, contact:

**B & K-PRECISION**, DYNASCAN CORPORATION
FACTORY SERVICE OPERATIONS
6460 West Cortland Street
Chicago, Illinois 60635
Telephone #: (312) 889-8870
Telex #: 25-3475

For information on ordering a subscription.

B+K PRECISION DYNASCAN CORPORATION

**6460 West Cortland Street**
**Chicago, Illinois 60635**

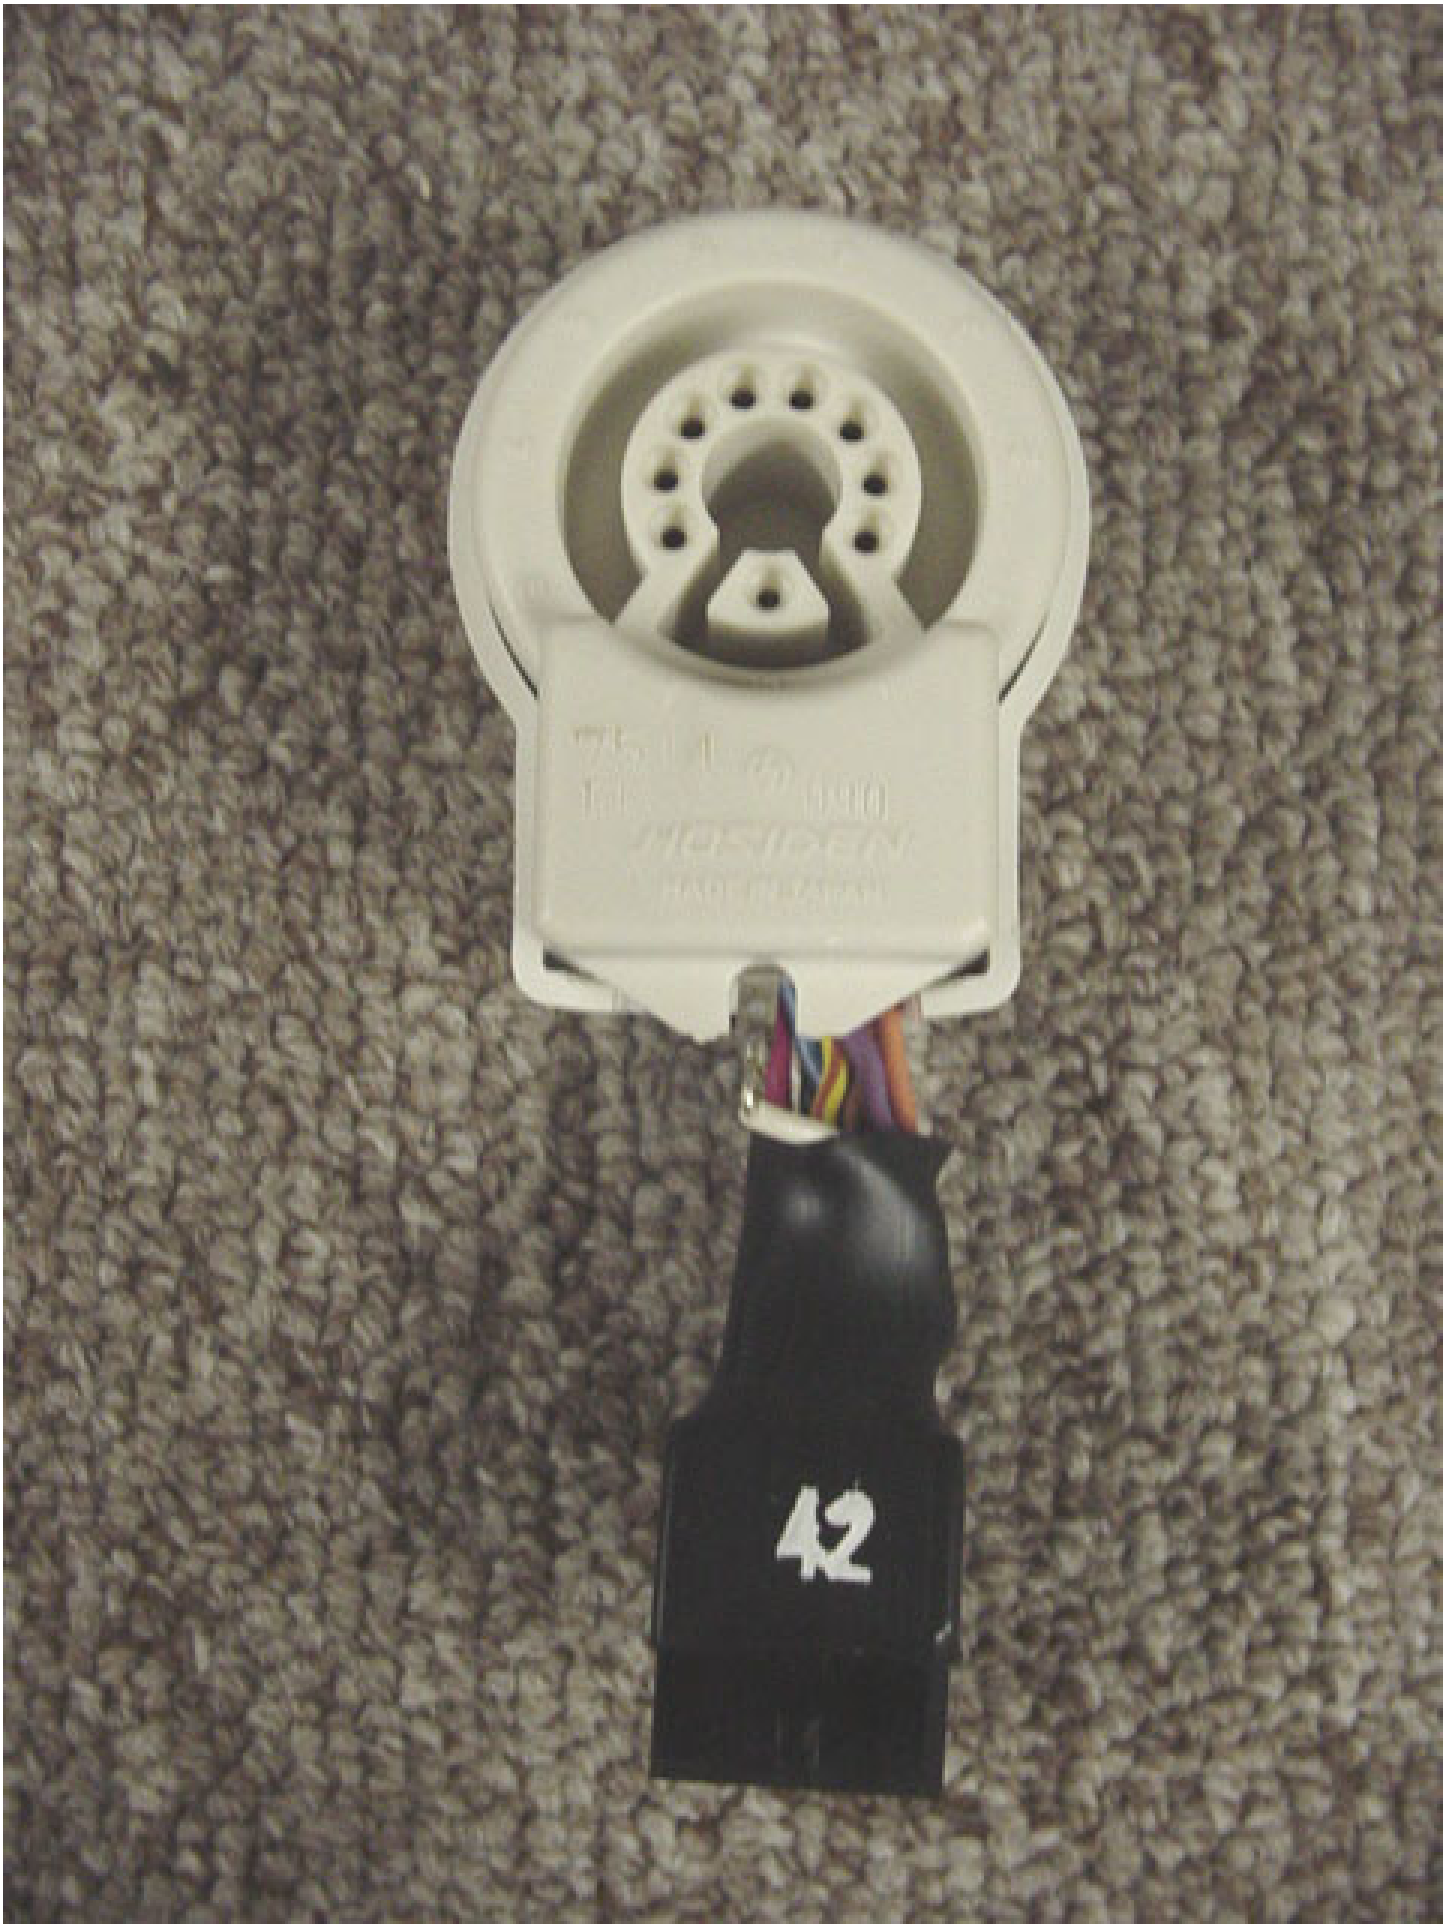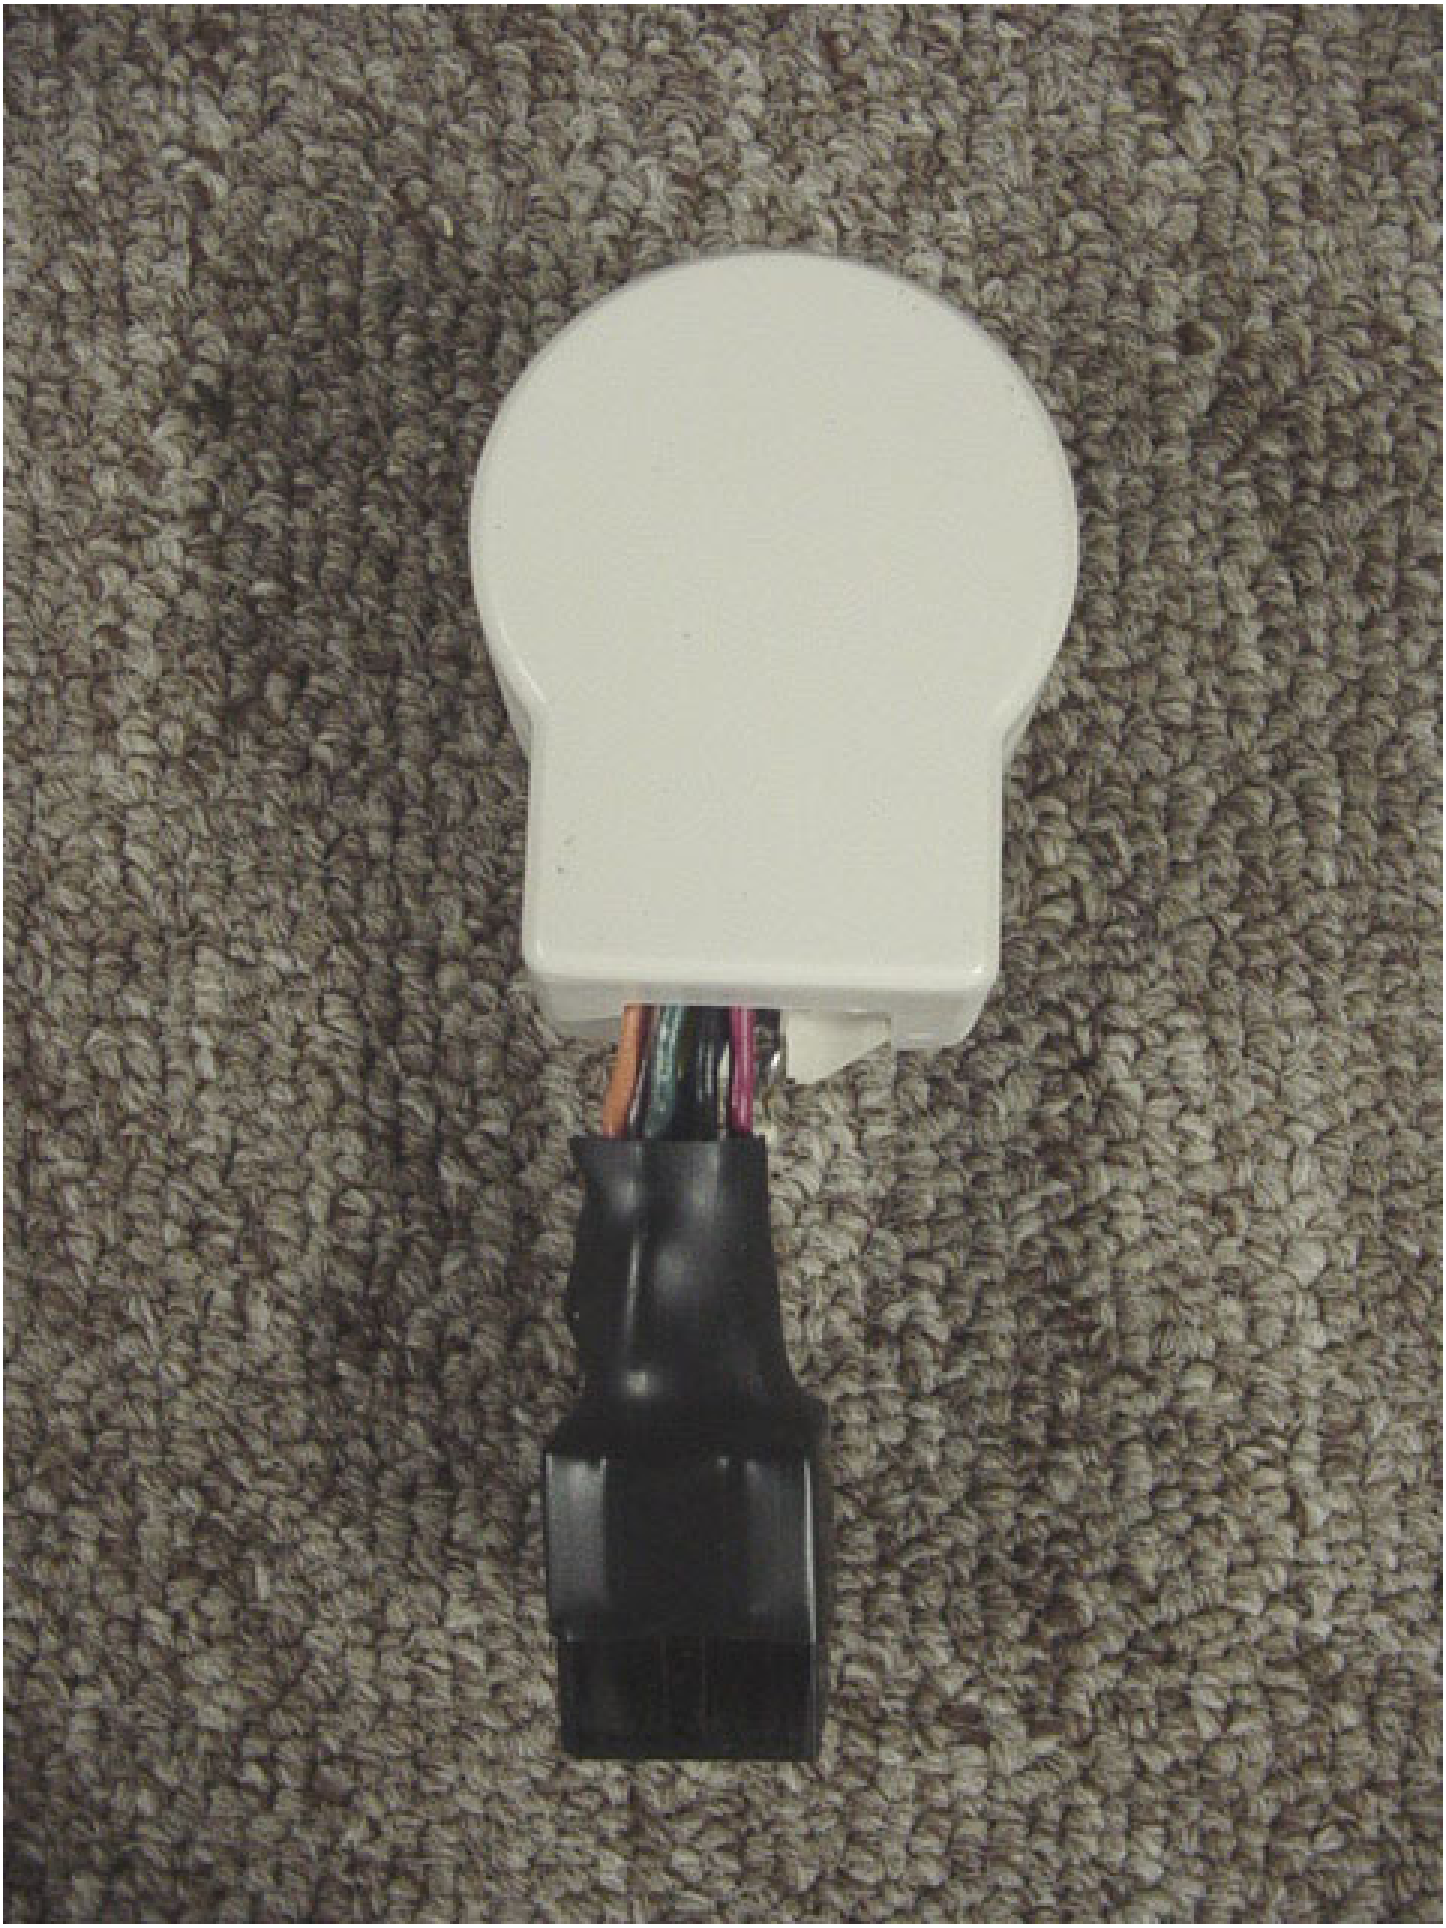
MOSIDEN
42